

Lasertæki

STANLEY

ST-0 77 188

S2

Working Range: Up to 10m

Working Environment: Designed for Interior use

Leveling Accuracy: +/- 1/2-in @ 10m

Line Accuracy: +/- 3/32-in end to end @

15&39; perpendicular distance

Laser Diode: Two 635-670nm

Laser Class: Class 3R/2M

Batteries: 3 "AA" Alkaline batteries (not included)

Battery Life: Up to 30 hours intermittent use



ST-0 77 154

SP-5

Sjálfstillandi

5 Geislar

Working Range: Up to 30m Visible Range

Working Environment: Designed for Interior use

Leveling Accuracy: +/- 2mm on 10m


Leveling Type: Pendulum Self Leveling, +/- 5 degrees in any direction

Laser Diode: Five 635-670nm, set into pendulum cluster

Laser Class: Class 2M/3R

Batteries: 3 "AA" Alkaline batteries (included)

Battery Life: Up to 60 hours intermittent use



ST-0 77 153

CL-2

Working Range : Up to 10m

Working Environment: Designed for interior use

Leveling Accuracy: +/- 6mm @ 9m



Leveling Type: Pendulum Self Leveling, +/- 4 degrees in any direction

Laser Diode: Two 635-670nm

Laser Class: Class 2M

Batteries: 3 "AA" Alkaline batteries (included)

Battery Life: Up to 60 hours intermittent use

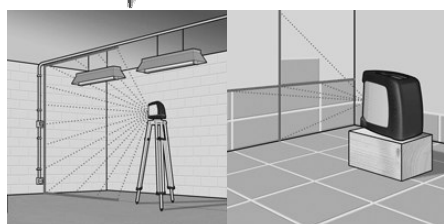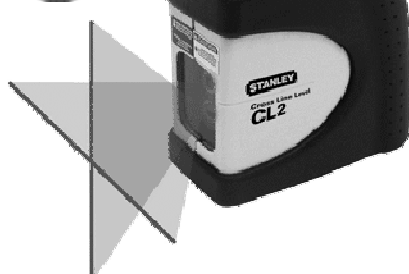

ST-0 77 155

CL-90

Sjálfstillandi

Með stöng í 3,2m

Arbejdsområde Op til 9 meters

sigtetfelt indendøre

Funktionsmiljø Til indendørs brug

Nivelleringsnøjagtighed Lod & vage

+/- 3mm @ 9 meter

Linienøjagtighed +/- 2mm @ 3 meter (ende-til-ende)

Nivelleringsstype Pendul,

selvnivellerende +/- 5 grader


Laserdiode 635 Nm

Laserklasse Klasse 2M

Batterier 3 "AA" Alkaline batterier

(medfølger)

Batterilevetid Op til 60 timer kontinuerligt drift

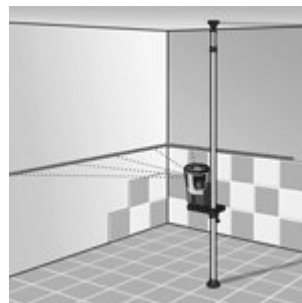

ST-1 77 184

Stök stöng 3,2m

Passar fyrir tæki:

CL-90, SP-5, CL-2



ST-0 77 163

Þrífótur



K. Þorsteinsson & Co.



5880 600



5687 581